



Sarena Manufacturing
22 Sabre Court
Gillingham Business Park
Gillingham, Kent
ME8 0RW, UK
Tel: + 44 (0) 1634 370 887
Fax: +44 (0) 01634 370 915
www.sarena.co.uk
sales@sarena.co.uk

Standard Connections for Sarena Tanks

Purpose made tank connections for rapid and effective connection to GRP tanks

Connection to SARENA Sectional and One-Piece tanks is simple and flexible. One-Piece tanks being a rectangular design and the wall panels of sectional tanks being exclusively flat.

Where connections are made to insulated tanks, a purpose made plastic trimming ring is used to seal and protect the exposed polyurethane insulation foam.

For W16-4 drinking water tanks, SARENA utilise the range of Combiscreen units. These terminate in a BSP female thread (Flange optional) and are designed to minimise the restriction to flow caused by the 650 micron mesh screen.

Preferred range of stock connections:

Brass compression up to 54mm

- PVCU NP16 Flange from 2.5" to 6"
- (Float valve installation)
- Combiscreen overflow connection from 3/4" to 6"

Note: Combiscreen overflow is mandatory for a W16-4 specification tank.

The following connections are also available ex-stock.

- Brass BSP threaded up to 2.5"
- PVCU NP16 Flange all sizes

The following connections are also available.


- PVCU Flange in all sizes as Table D, E or ASA 150
- Combiscreen overflow 8" or larger
- ABS connections



FLANGE CONNECTION



COMBISCREEN UNIT

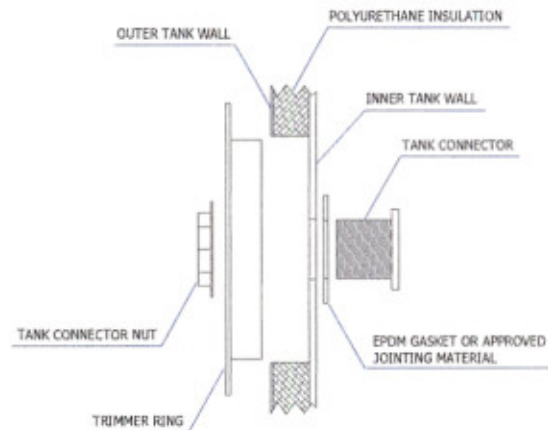

STANDARD CONNECTION

LARGE
COMBISCREEN



COMPRESSION
CONNECTION



BSPT CONNECTION



WRAS
APPROVED
PRODUCT

